



CT23IZ06

Double DIN Fitting Kit for Isuzu Vehicles



IN THE KIT

- Double DIN Fascia Panel
- Brackets
- Screws (x4)

APPLICATION

Note: Application data is subject to change at any time

Isuzu D-Max 2020 >

Please Note: this installation works for vehicles with and without an OEM touch screen.

FEATURES

- Allows for the installation of a double DIN aftermarket stereo
- Includes mounting brackets and fitting accessories
- Finished in piano black to match vehicle dashboard

DISCLAIMER

The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s. This instruction manual is based on documented data and research. The manufacturer of this product cannot be held responsible for any changes made to the vehicle by the manufacturer or damages that may occur through the installation of this product in accordance with the steps outlined herein.

PRIOR TO INSTALLATION

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are used during the installation to avoid damage to the vehicle or product. **Connects2 can not be held responsible for the installation of this product.**

INSTALLATION GUIDE

DASH DISASSEMBLY

1.



with single DIN radio.



with touch screen radio.

It is worth noting that this double DIN fascia kit will work with both OEM single DIN and touch screen system layouts.

In both cases, begin the installation by using a panel removal tool to disengage the clips that hold the main fascia panel in place. This panel also includes the side vents. Once out, remove all connections between either the single DIN radio or touch screen monitor.


2.



With the main fascia panel out of the way, undo the following four screws and put these to one side. With the screws out, fully remove the metal bracket.

Note: touch screen models will have the main head unit housed here. Simply disconnect the wiring and follow the guidance above.

3.

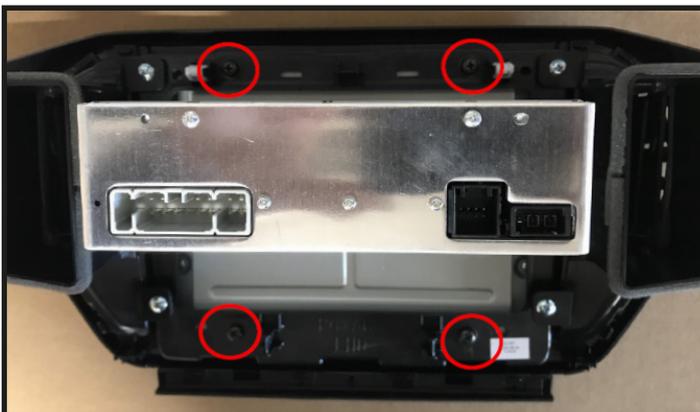

Undo all four screws located on the rear of the main fascia panel. These screws will disengage the air vents and trim from the main single DIN unit/touch screen.

Need help? Visit support.connects2.com/tickets/technical

INSTALLATION GUIDE


4.



Position the new fascia panel in front of the main air vent/trim panel and screw into place using the screws provided in this kit.

BRACKET ASSEMBLY

5.

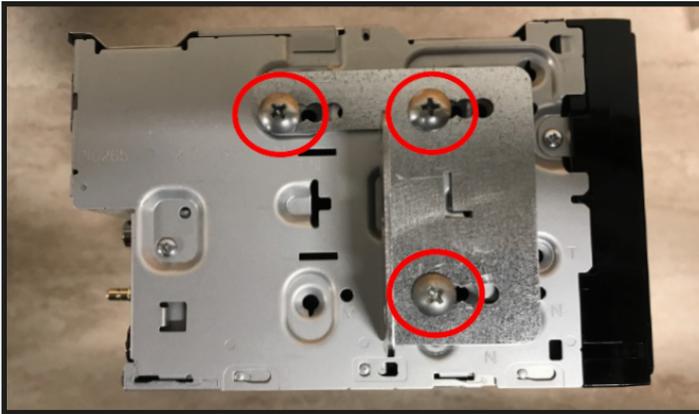

Take the brackets found within the kit and offer them up to the relevant side of the new radio. Once positioned correctly, screw them into place using a set of radio screws (*not supplied with this kit*).

DASH ASSEMBLY

6.



With the brackets attached and the connections made to the rear of the radio, place the unit into the dashboard and screw into place using the four pre-existing screws removed in earlier (*see Step 2*).

7.



Place the new fascia panel over the front of the new radio to complete the installation.

Note: if the radio sits too far forward/back, repeat the process from **Step 5** and adjust the depth of the radio accordingly.

NOTES
