



**CT23AR15**

## Double/Single DIN Fitting Kit for Alfa Romeo Vehicles



### IN THE KIT

- Double DIN Fascia Panel
- Radio Brackets
- 8x Torx Screws
- 4x Phillips Screws

### APPLICATION

*Note: Application data is subject to change at any time*

**Alfa Romeo Giulietta (Type 940)**

**2014 - 2021**

*Note: for facelift models. Dashboard modification needs to take place in order to fit new stereo.*

### FEATURES

- Allows for the installation of a double/single DIN aftermarket stereo
- Includes mounting brackets and accessories
- Finished in gloss black to match vehicle dashboard

#### DISCLAIMER

*The information provided in this document is subject to change without notice due to manufacturer changes and/or improvements to the product/s. This instruction manual is based on documented data and research. The manufacturer of this product cannot be held responsible for any changes made to the vehicle by the manufacturer or damages that may occur through the installation of this product in accordance with the steps outlined herein.*

# PRIOR TO INSTALLATION

Read the manual prior to installation. Technical knowledge is necessary for installation. The place of installation must be free of moisture and away from heat sources. Please ensure that the correct tools are used during the installation to avoid damage to the vehicle or product. **Connects2 can not be held responsible for the installation of this product.**

## INSTALLATION GUIDE

### DASH DISASSEMBLY

1.



Please note: this fascia is for vehicles with the following fascia/radio set-up. Please ensure you have the correct product & tools before starting any installation.

2.




Open the glovebox and begin by unclipping the following circular piece of plastic.

3.



Once the circular cap has been removed, proceed to undo the screw that is located therein.

4.

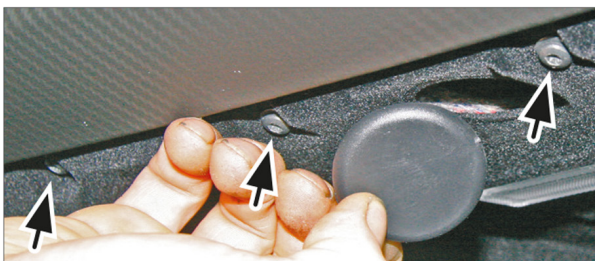

Proceed to then remove the following screws that are on show within the lip of the glovebox.

# INSTALLATION GUIDE

## DASH DISASSEMBLY

5.



With all of the screws removed, use a panel removal tool to disengage the main fascia panel and remove it whilst disconnecting the side button connector(s).

6.



Undo the 4x screws that surround the main radio.


7.



With the screws removed, begin to pull the radio out of the dashboard and disconnect all of the wiring.

## DASH MODIFICATION

8.

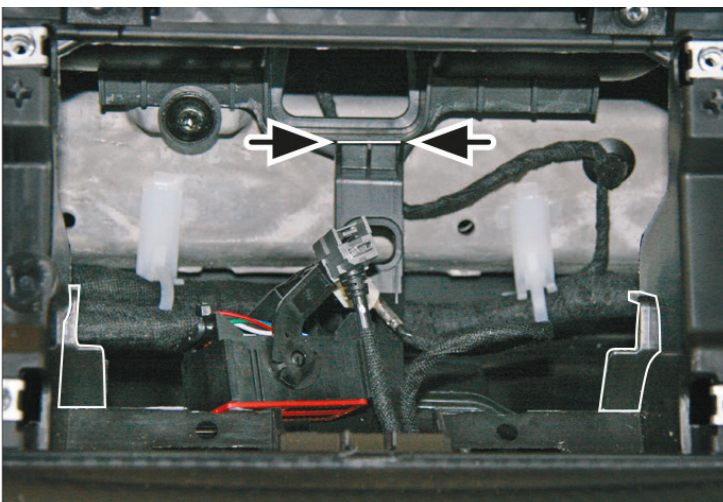

The highlighted area(s) will need to be cut out of the dashboard in order to allow the new double DIN unit to sit correctly.


***When performing any modification to the vehicle, always ensure to measure where the stereo will sit and take due care when performing cuts to the vehicle.***

***Connects2 always promotes the use and expertise of professional installers. Connects2 will not be held responsible for any damage to the vehicle.***

# INSTALLATION GUIDE

## KIT ASSEMBLY

9.

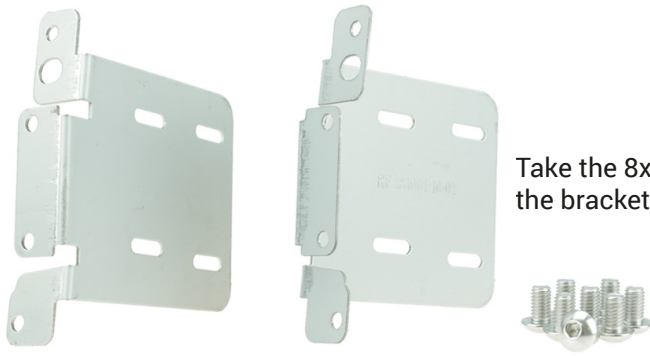

Take the 8x Torx screws that come within the kit and begin to align the brackets onto the new stereo.

10.



Take the 4x Phillips screws that come within the kit and, with the brackets attached to the new stereo, align the new fascia over the front. Use these screws to then secure the fascia.

## DASH ASSEMBLY

11.



With kit assembly performed correctly, make all of the connections to the stereo and install into the dashboard. Once seated correctly, secure the unit by using the pre-existing screws.

12.



Once screwed down, reintroduce the main fascia panel, remembering to reconnect the connections and proceed to reassemble the rest of the dashboard.